

APPROVED	O.G. FIG.	
BY	CLASS	SUBCLASS
DRAFTSMAN		

1/19

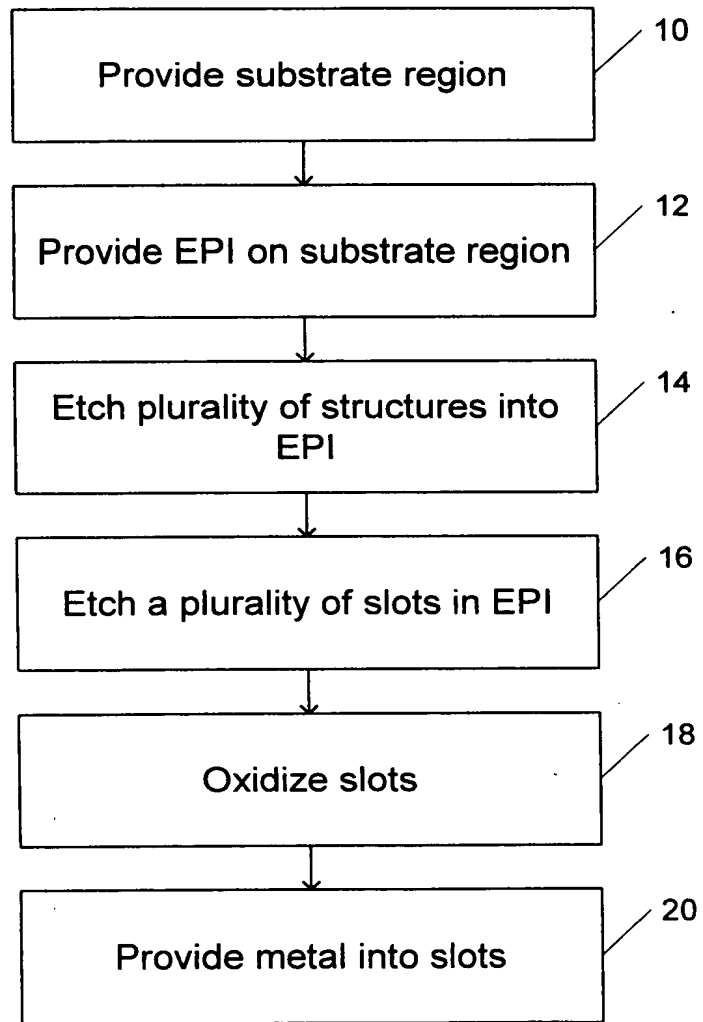


Fig. 1

204000 524000

APPROVED	O.G. FIG.	
BY	CLASS	SUBCLASS
DRAFTSMAN		

2/19

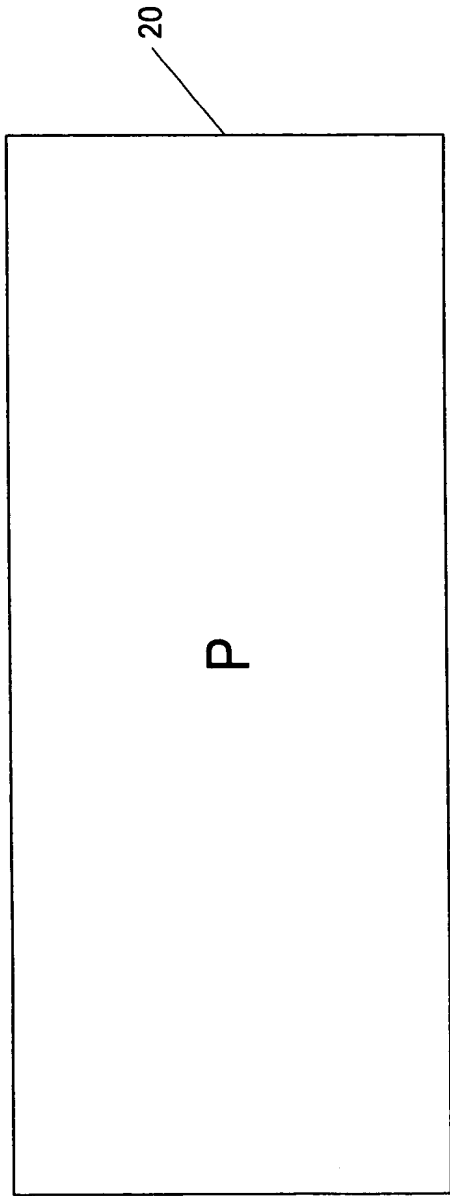


Fig. 2a

204000-64242000

APPROVED	O.G. FIG.	
BY	CLASS	SUBCLASS
DRAFTSMAN		

3/19

204020" 6244500T

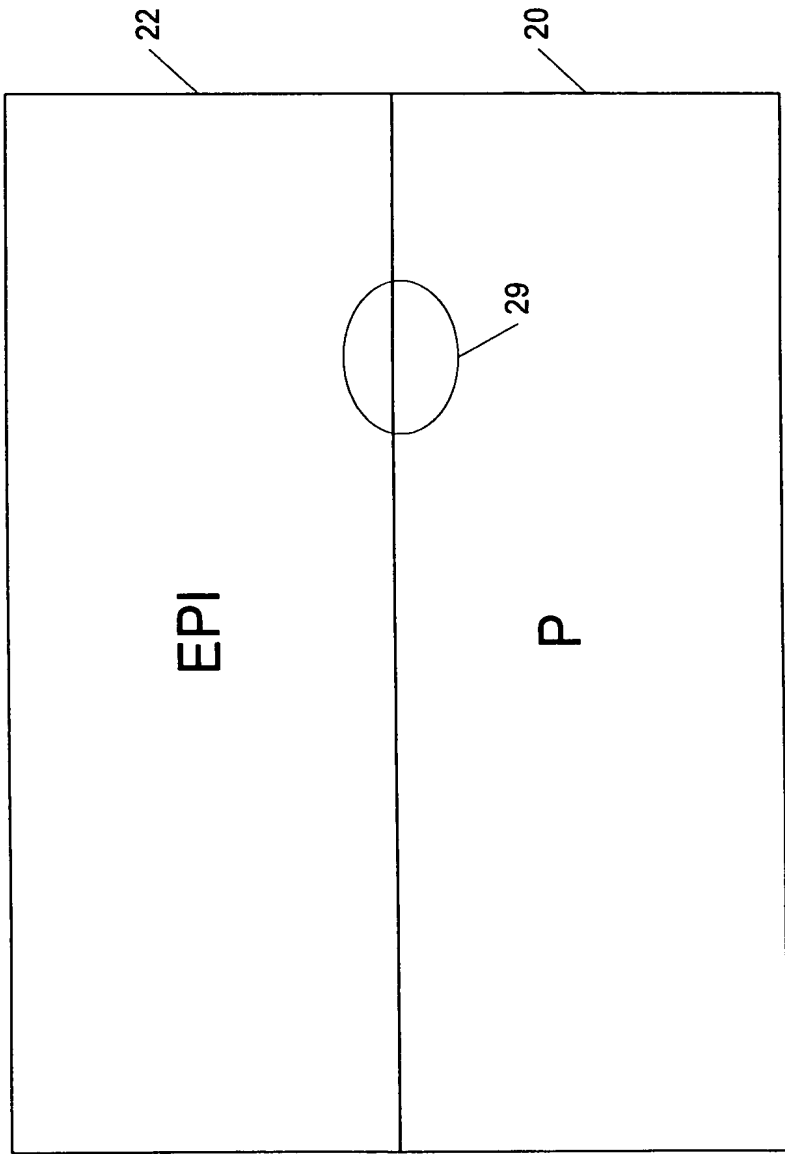


Fig. 2b

204300 6424003

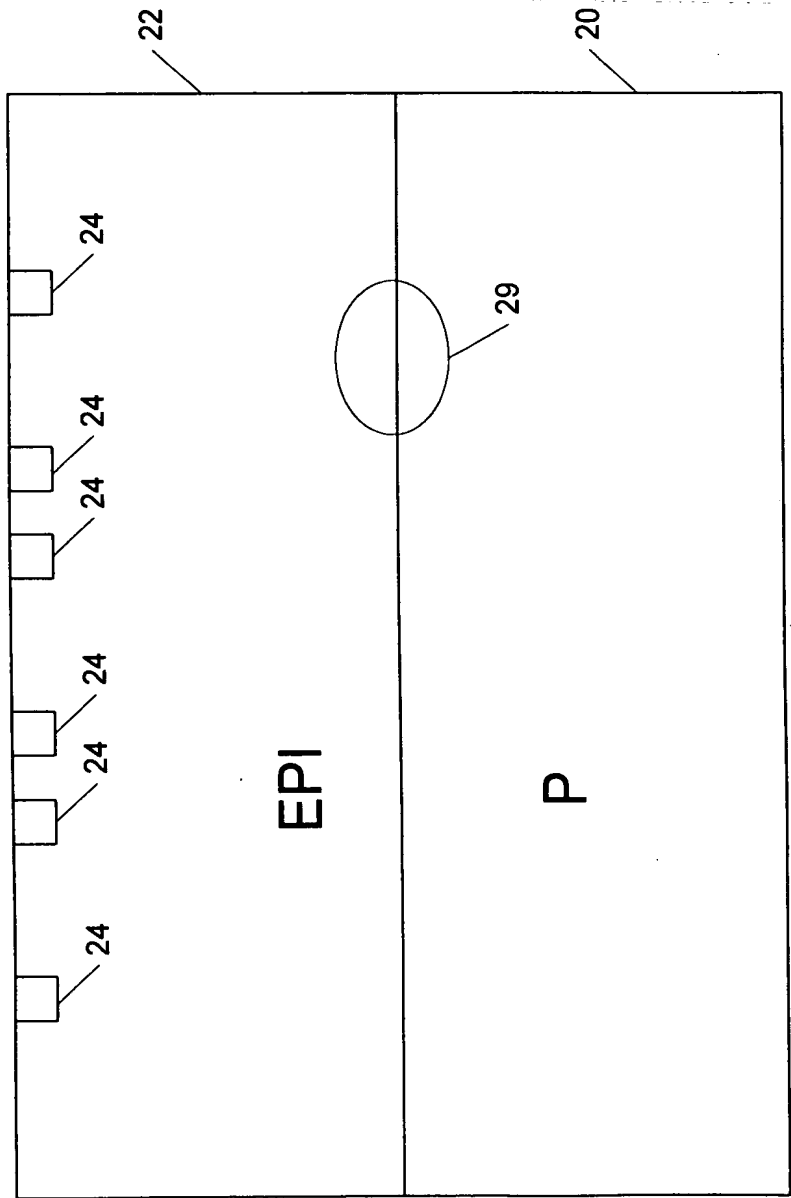


Fig. 2c

APPROVED	O.G. FIG.	
BY	CLASS	SUBCLASS
DRAFTSMAN		

5/19

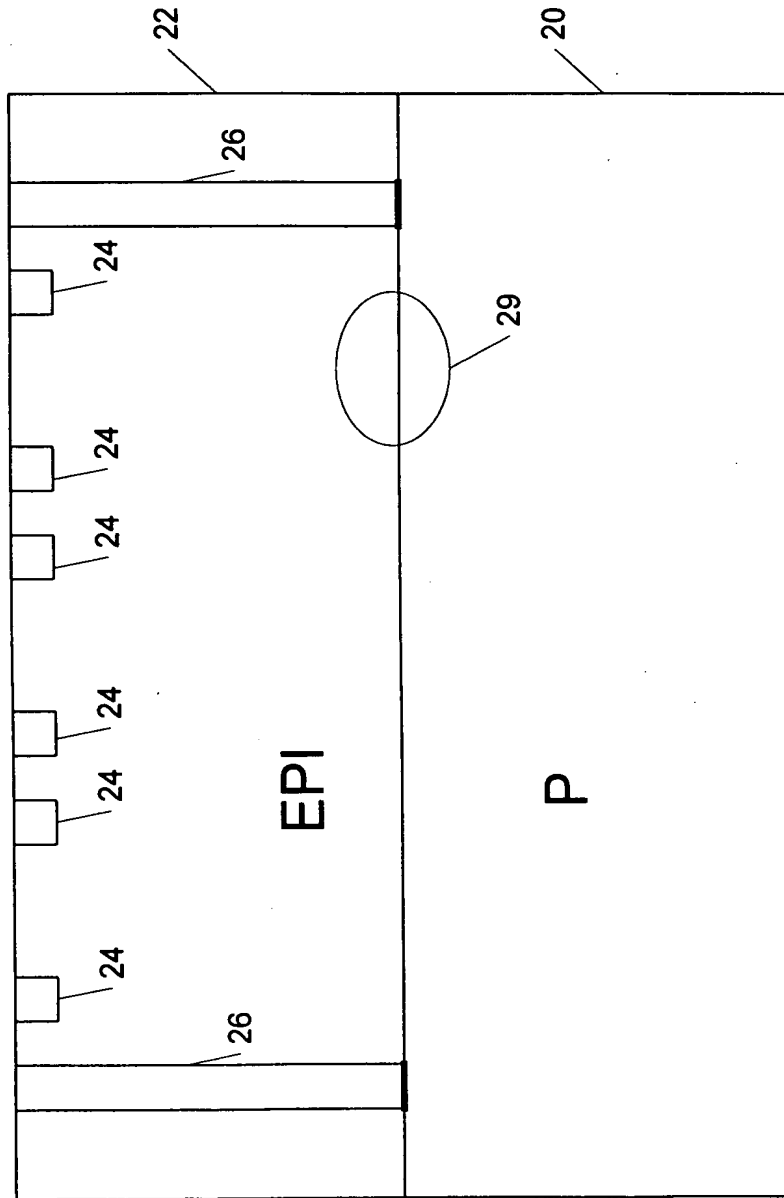


Fig. 2d

APPROVED	O.G. FIG.	
BY	CLASS	SUBCLASS
CRAFTSMAN		

2010090624E001

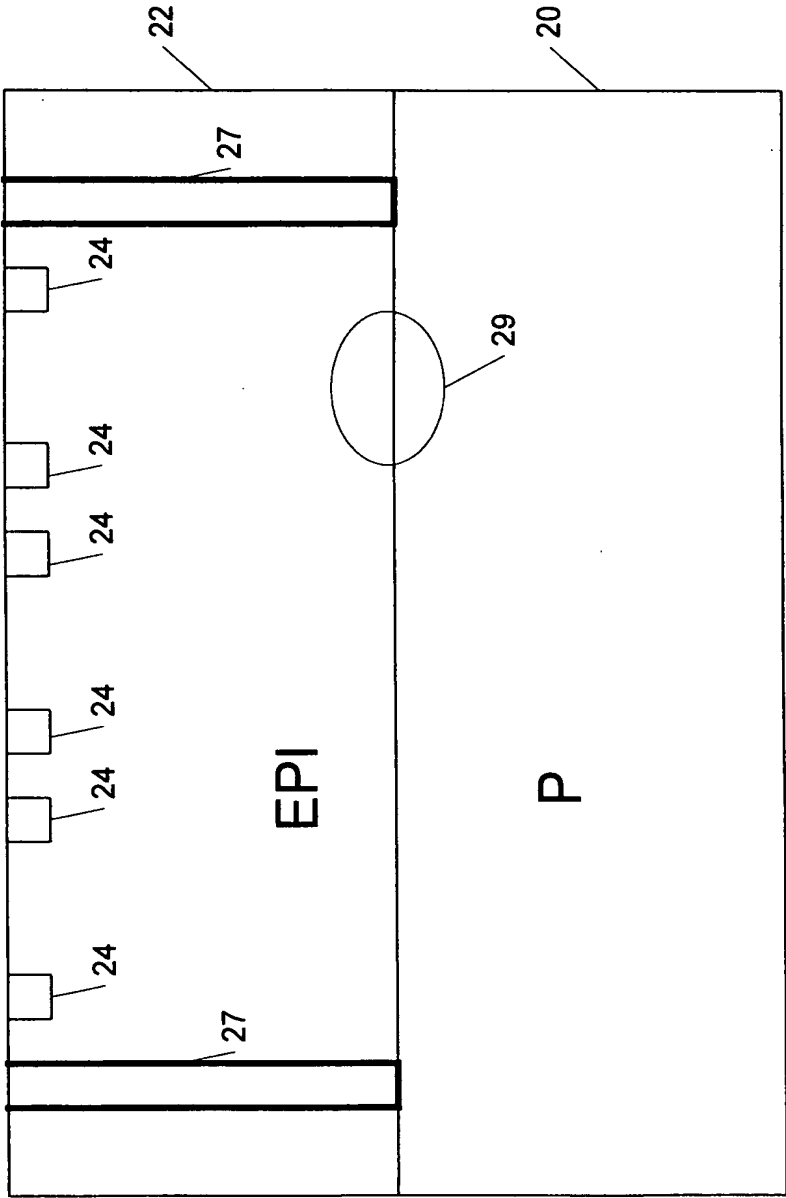


Fig. 2e

APPROVED	O.G. FIG.	
BY	CLASS	SUBCLASS
DRAFTSMAN		

7/19

204000" 6224E00T

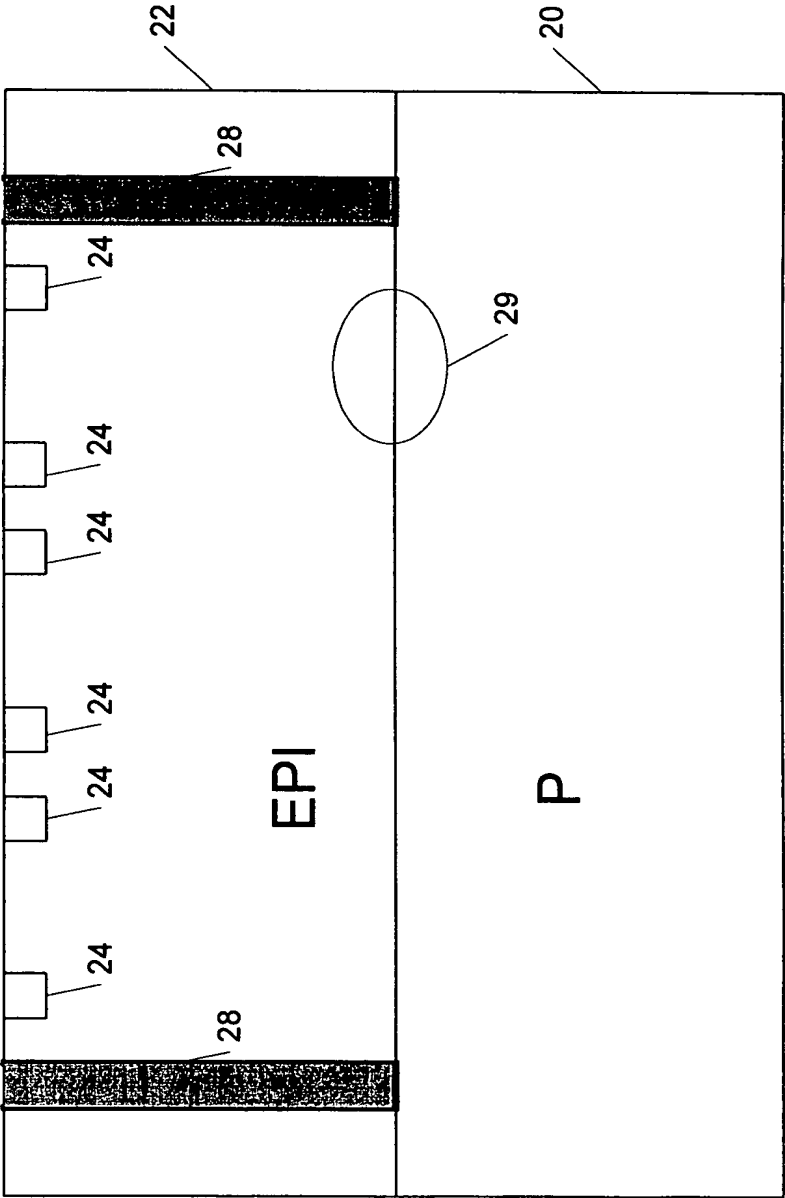


Fig. 2f

APPROVED	O.G. FIG.	
BY	CLASS	SUBCLASS
DRAFTSMAN		

8/19

204050" 524500T

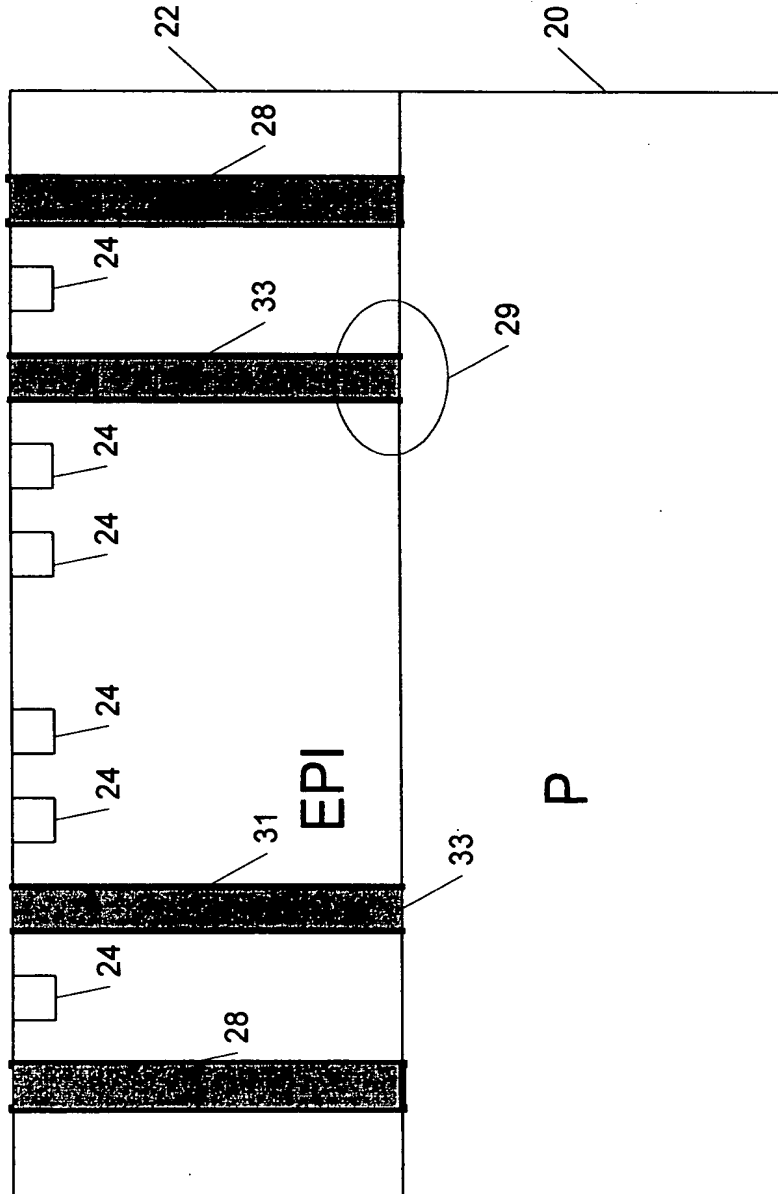


Fig. 2g

APPROVED	O.G. FIG.	
BY	CLASS	SUBCLASS
DRAFTSMAN		

9/19

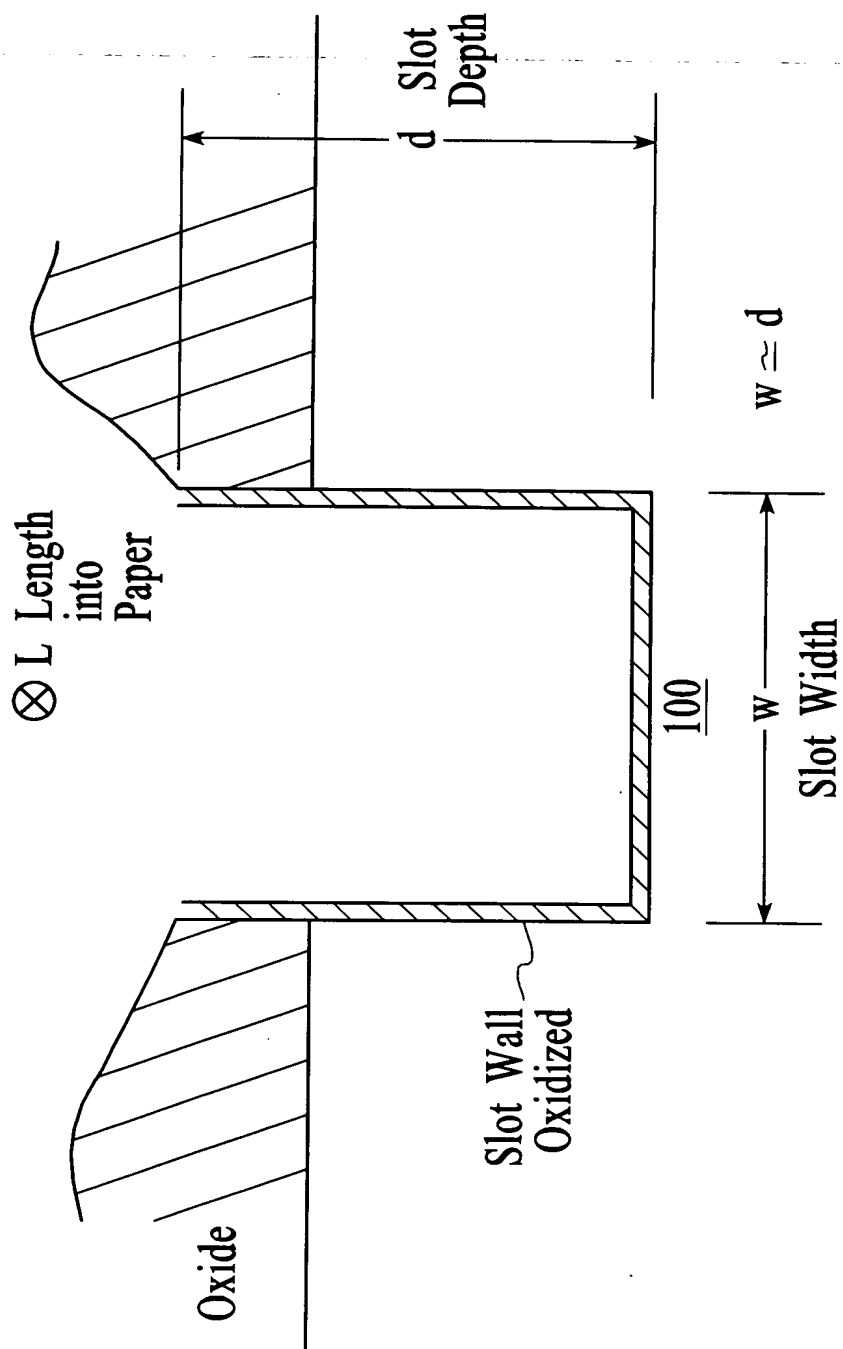


FIG. 3

10/19


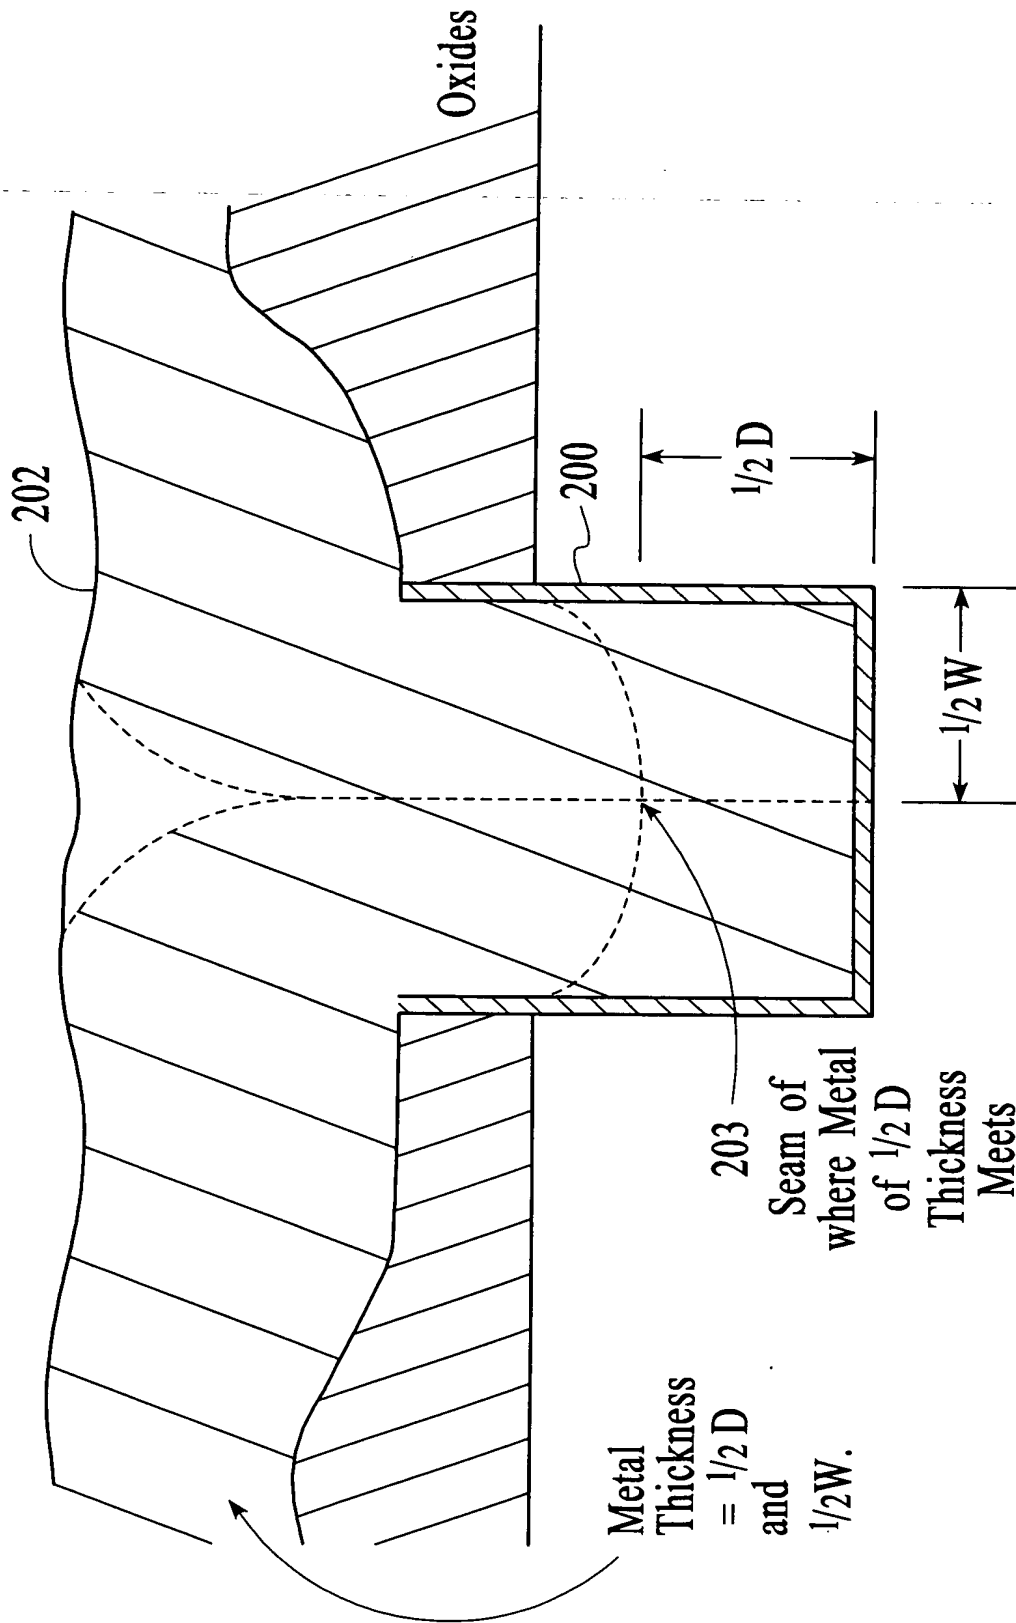


FIG. 4

APPROVED	O.G. FIG.	
BY	CLASS	SUBCLASS
DRAFTSMAN		


11/19

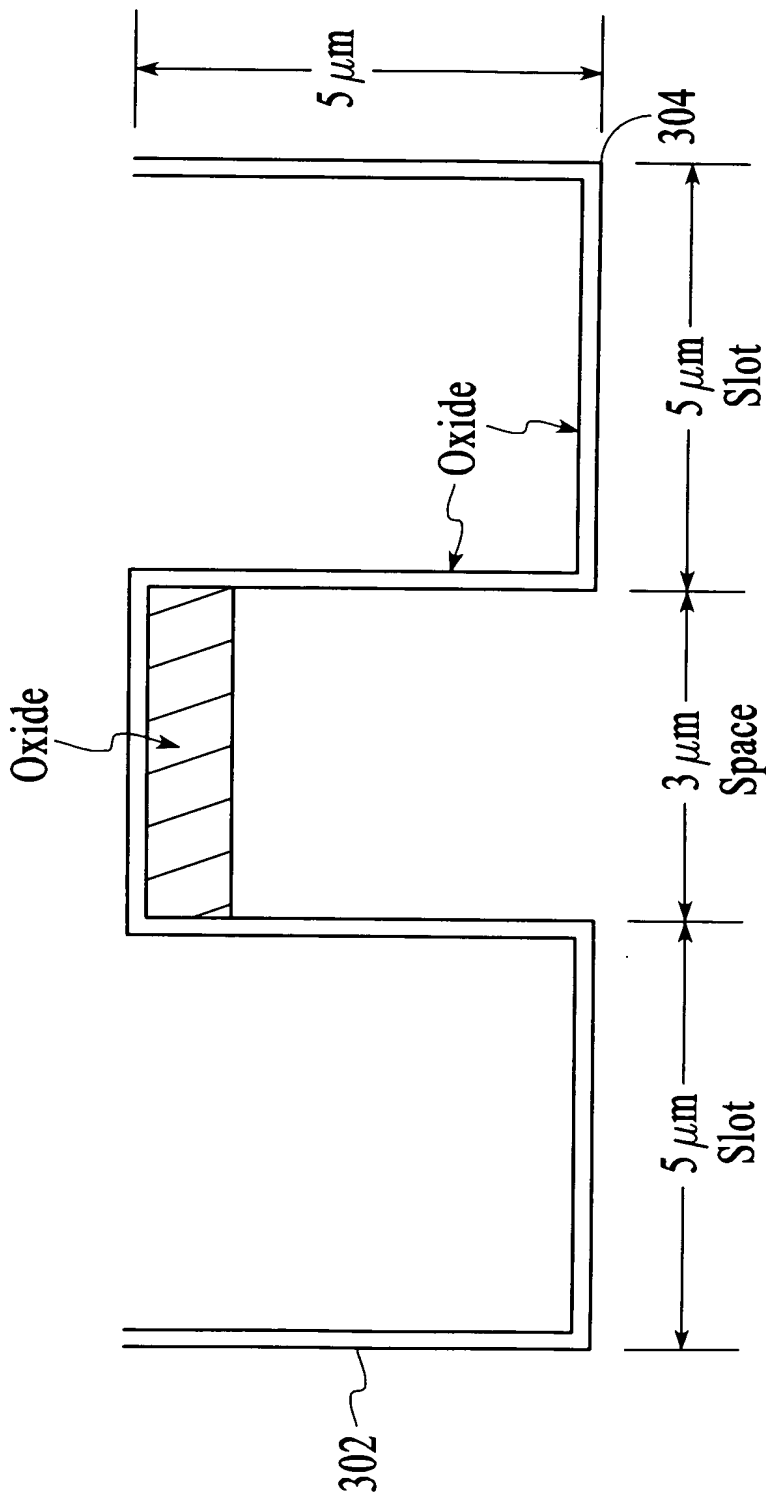

Double Slot for
Double Width of Metal
 $3\mu\text{m}$ Space Between Slots

FIG. 4A

12/19

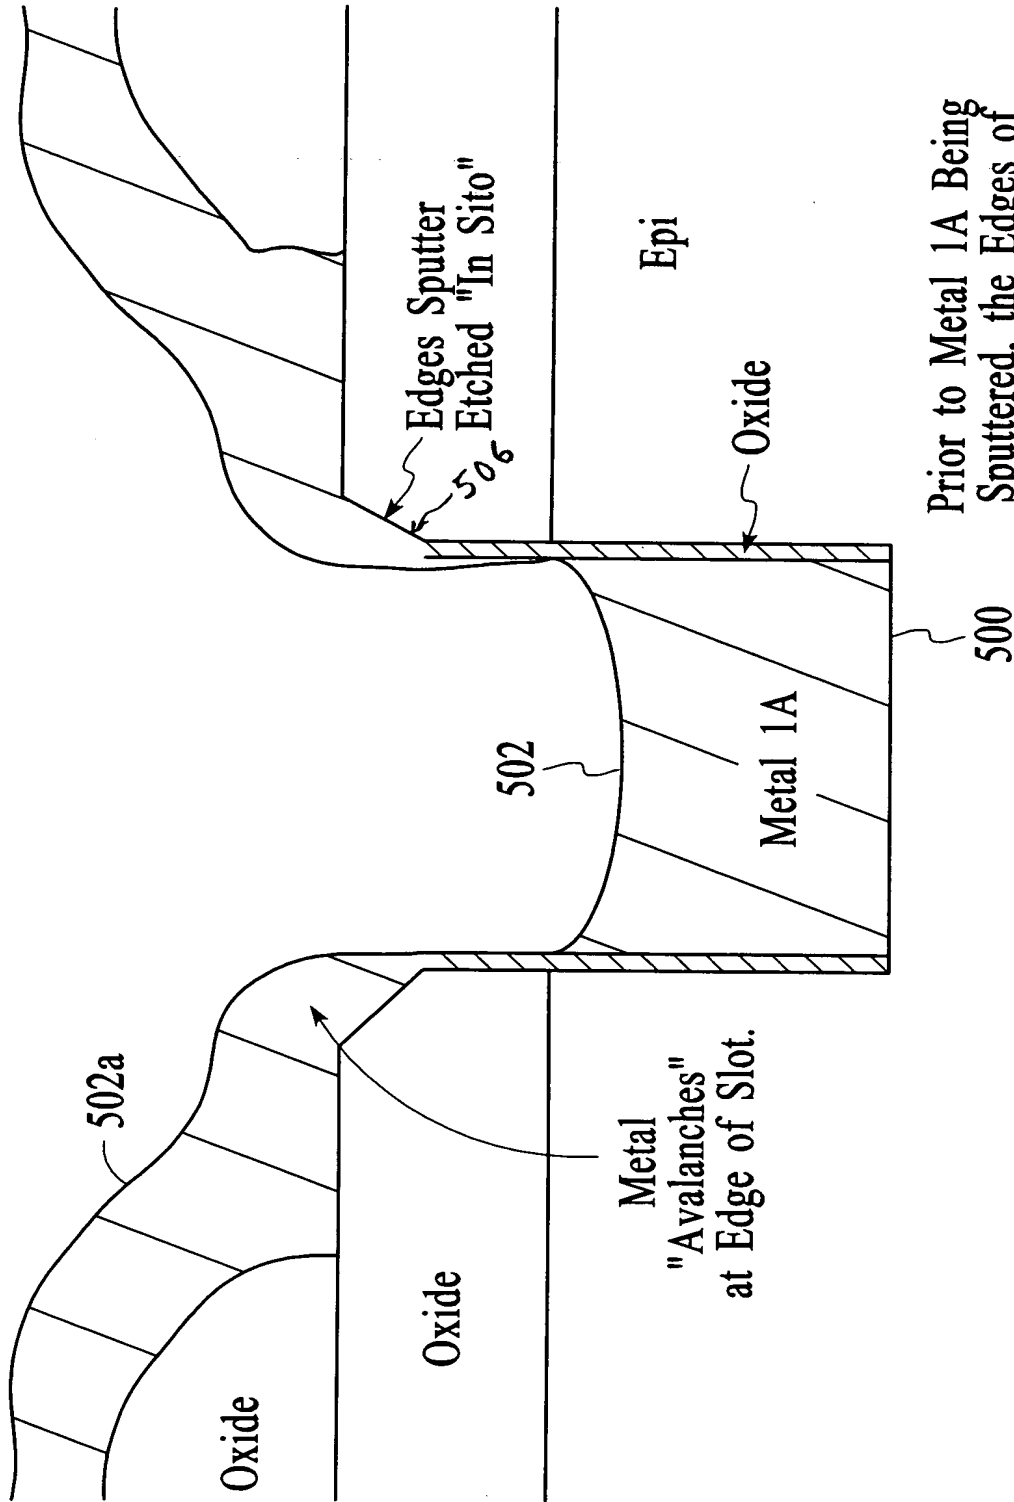


Prior to Metal 1A Being
Sputtered, the Edges of
the Oxides are Sputtered
Etched "In Situ" and
1A Deposited

FIG. 5


2040100 624000

14/19

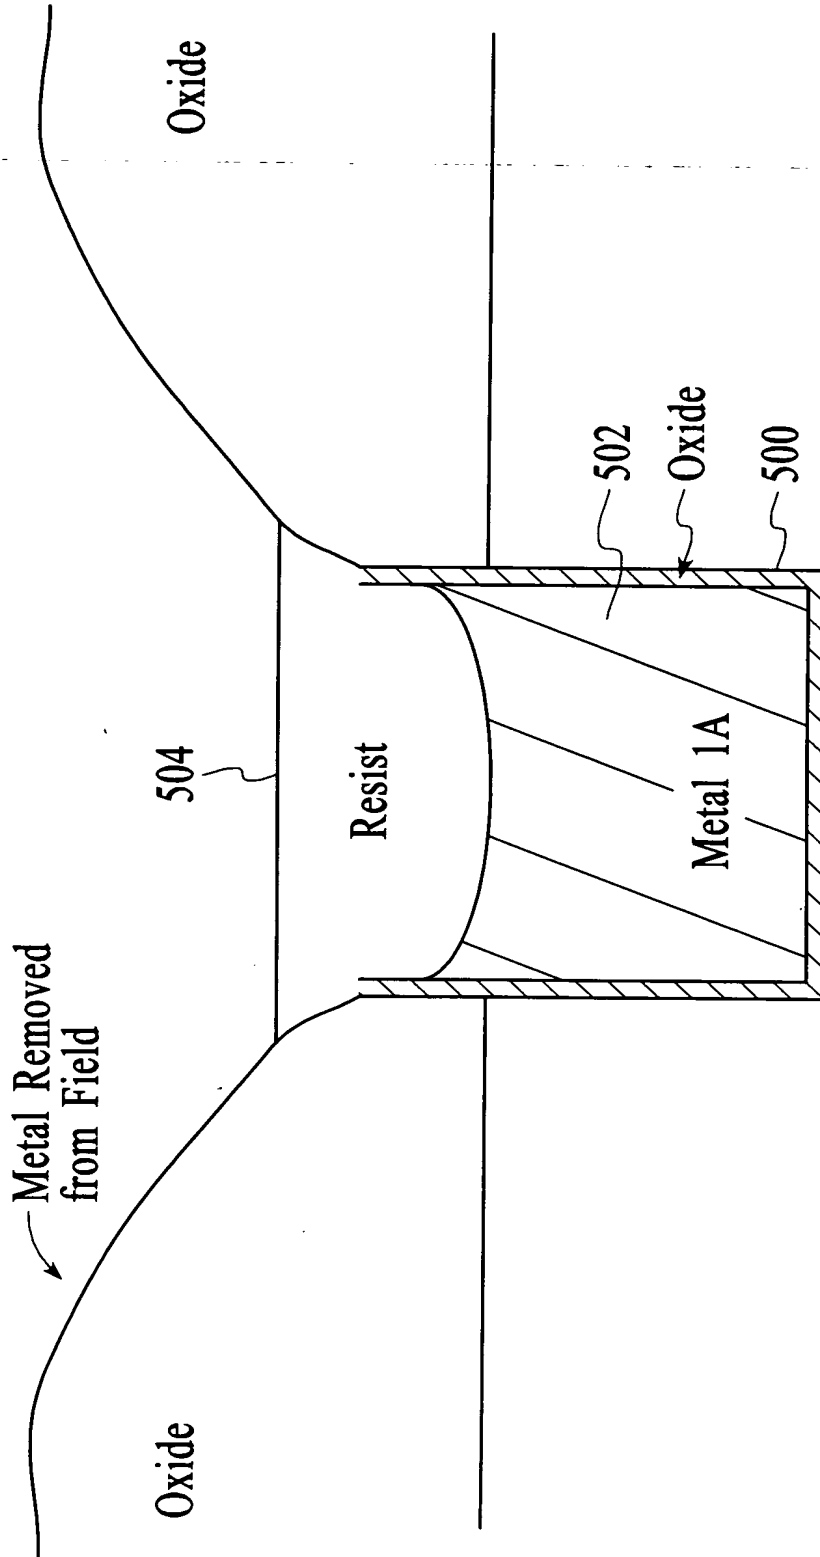

Resist Planar Etched Leaving Resist
in Slots. Field Metal Etched Off.

FIG. 7

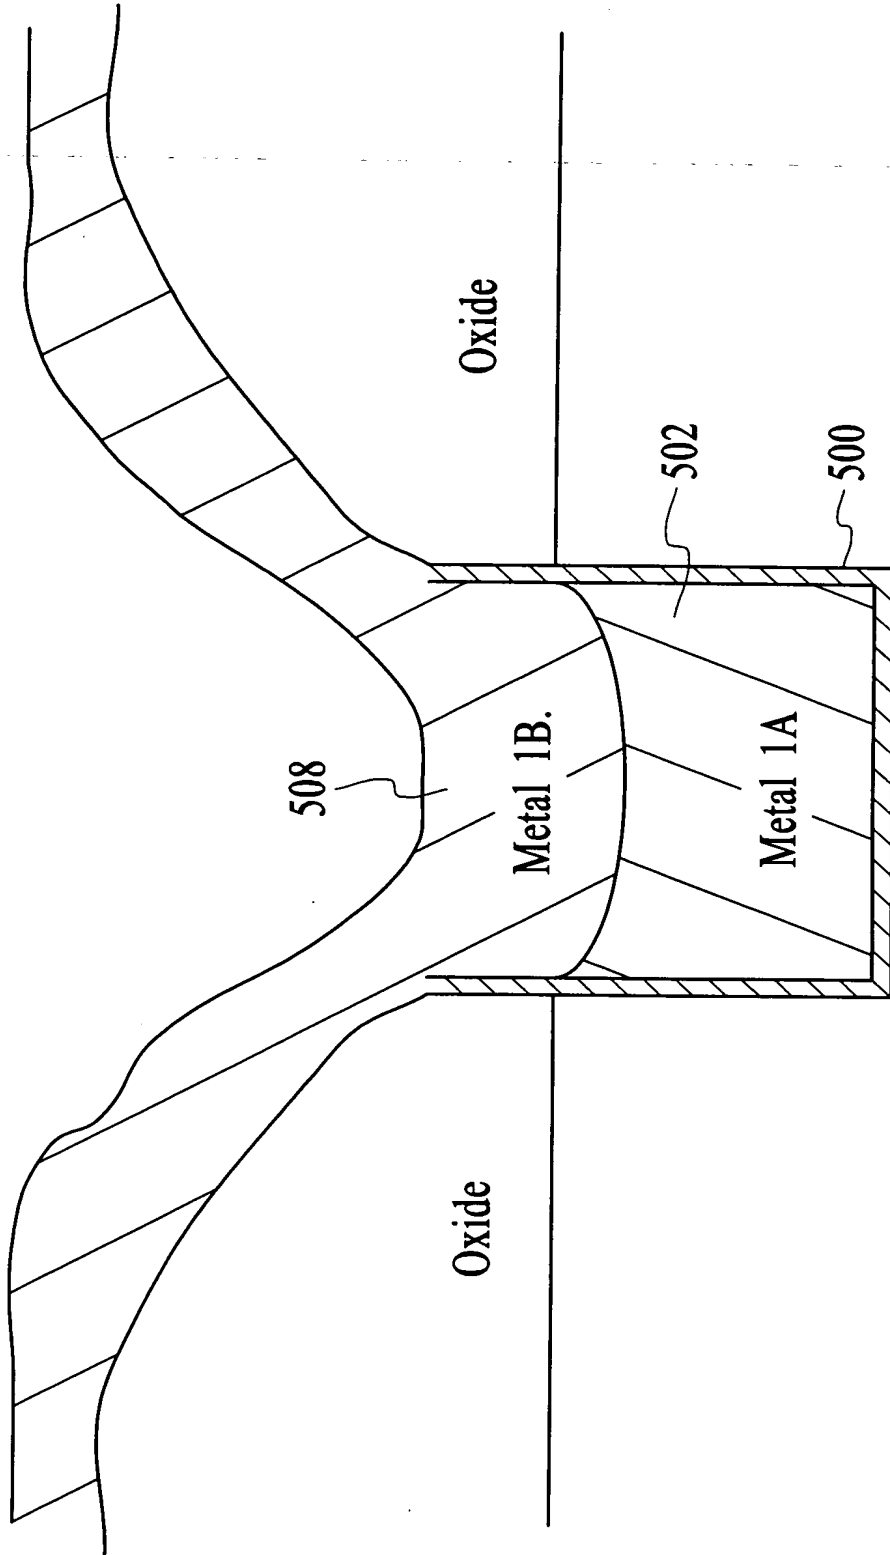

Resist Stripped & Second Metal 1B
Sputter Deposited

FIG. 8

2040000 " 5240000"

204950" 5/24/2007


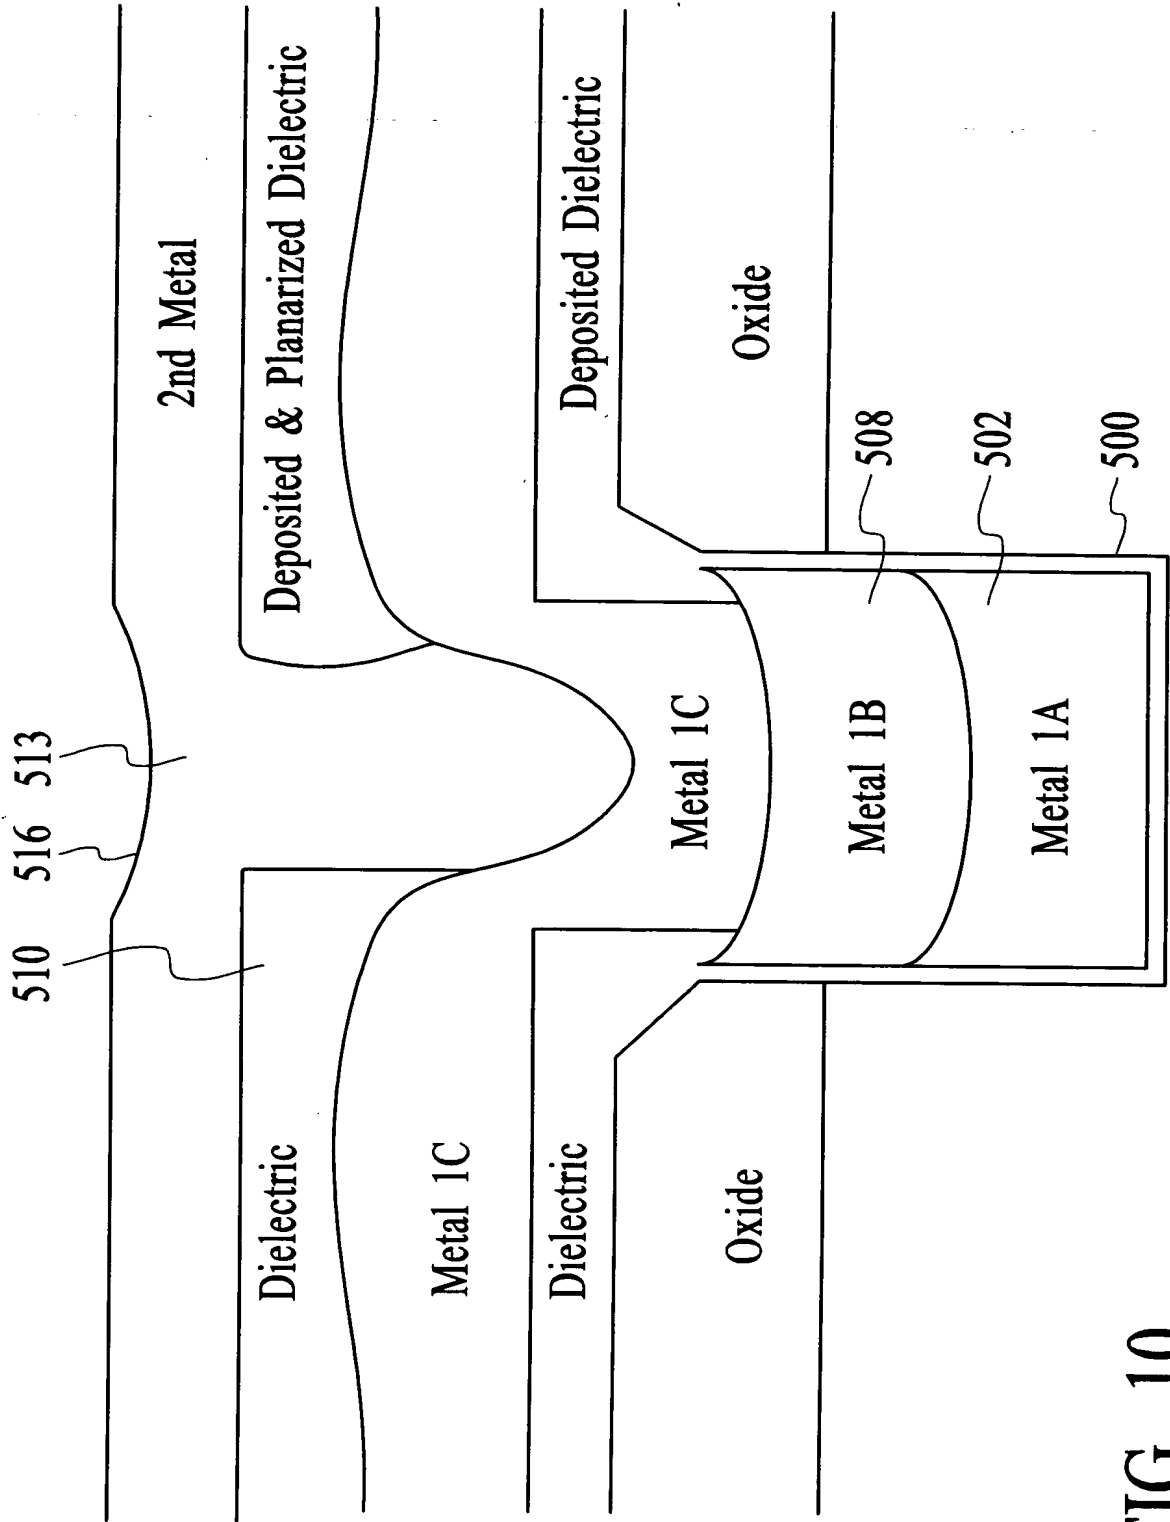


FIG. 10

18/19

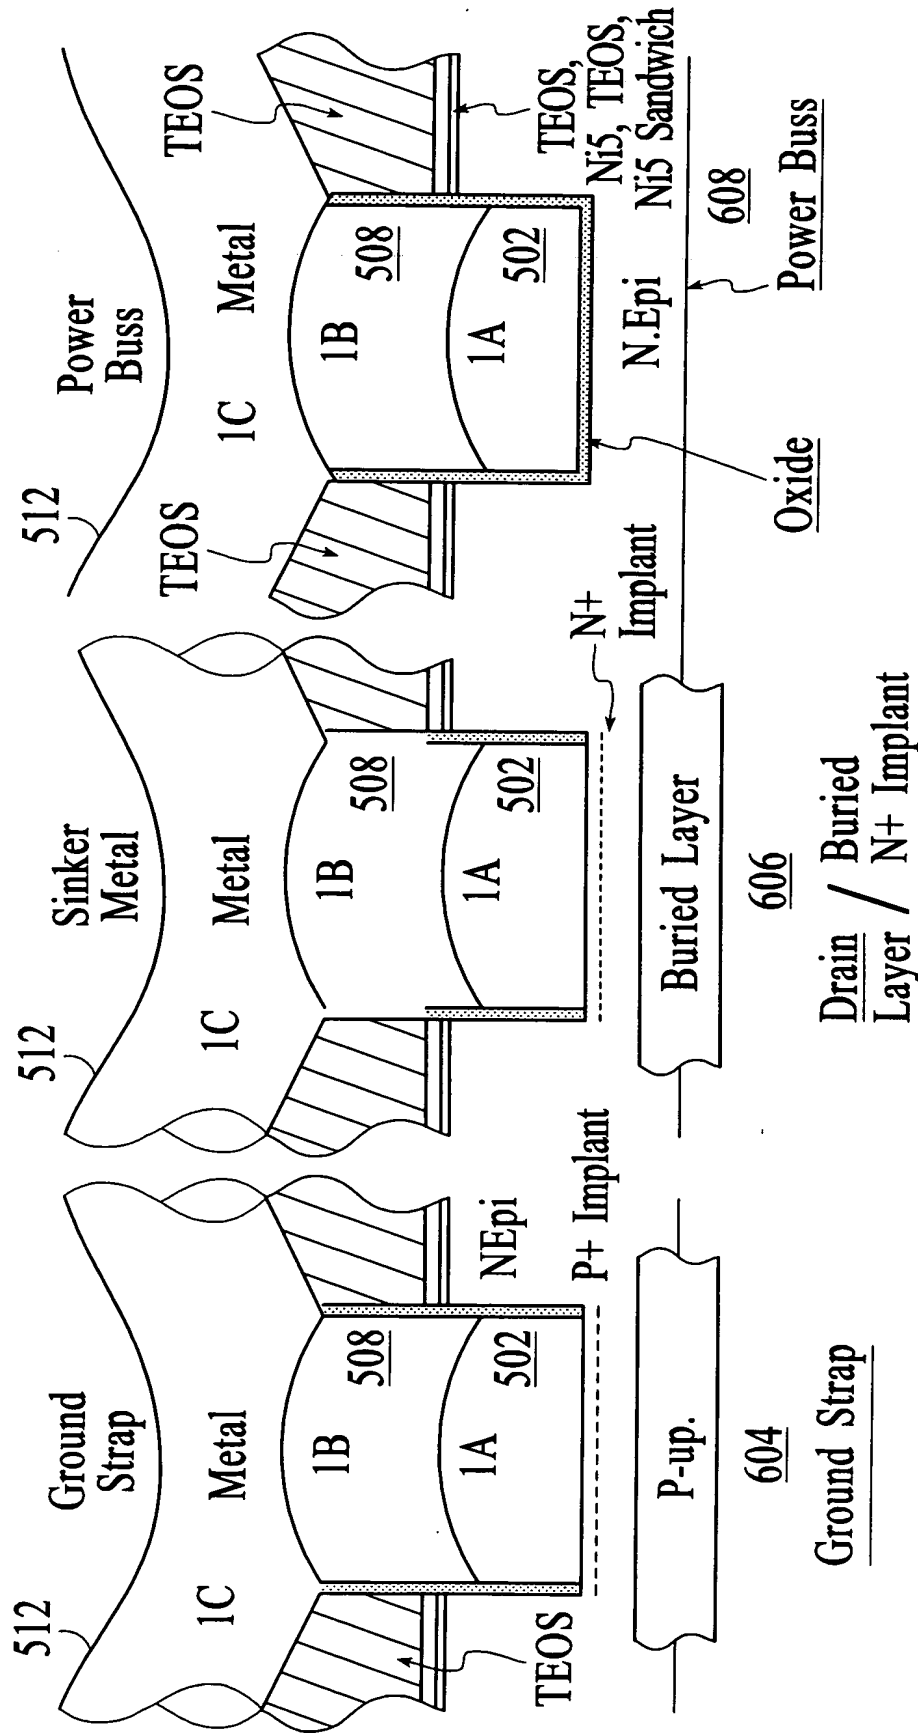

Ground Strap / Power Buss / Drain Metal Sinker

Shown after layers of Dielectric followed by 90 OD Å TEOS - Polish - Slot Mask - Metal. Metal 1.5 - 2.0 μm deposited.

Power Metal

FIG. 11

2040923" 6224E007

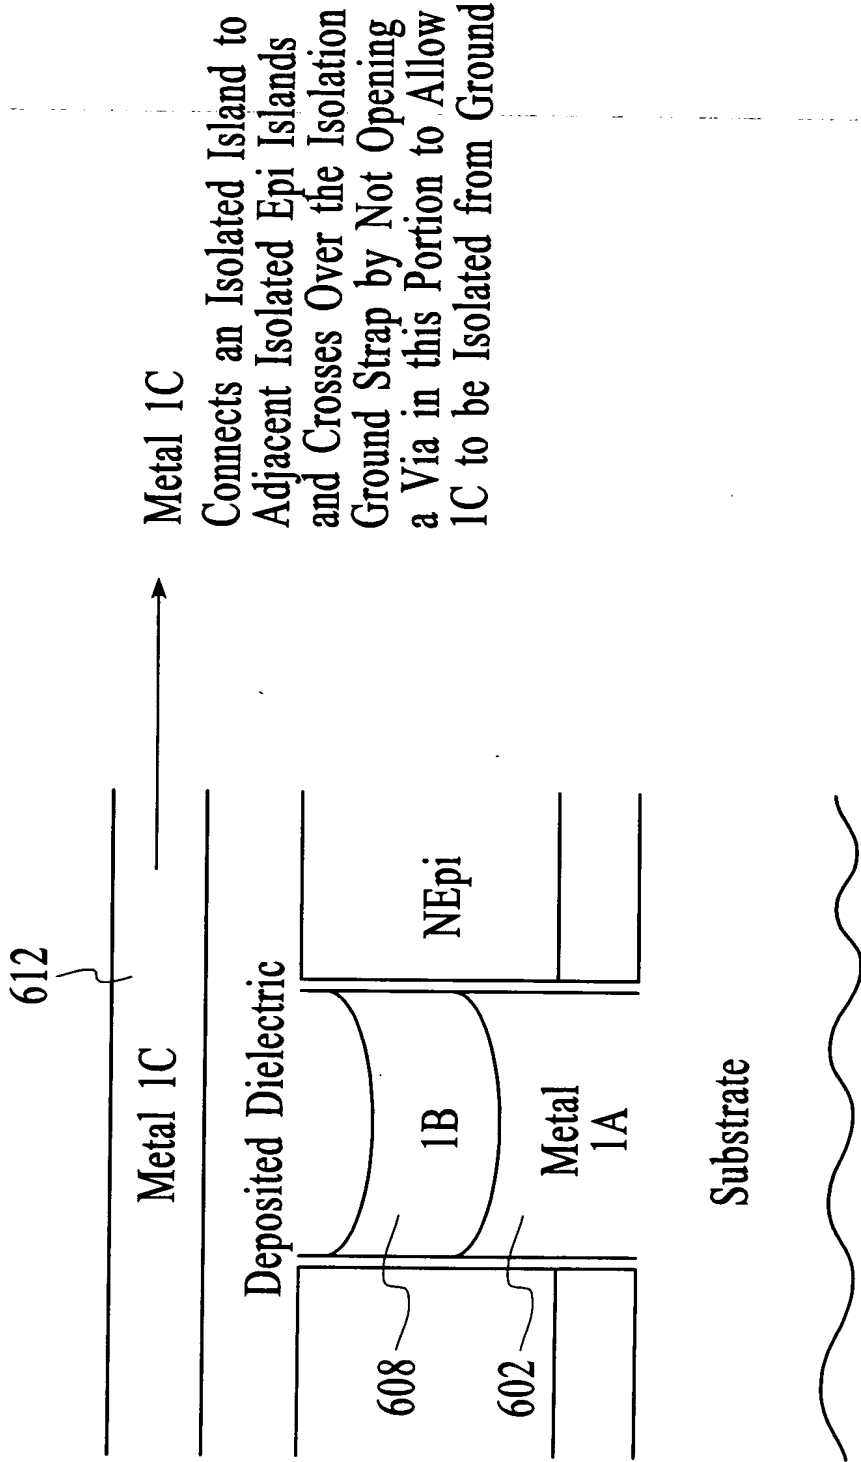


FIG. 12